



Green Tech Green Life

The polar bear, like a white spirit, wanders through its pristine, snowy realm, yet stands on the brink of vanishing as the world warms. With advanced control modes and intelligent energy-saving technology, RhymeBus' HVAC Dedicated Inverter effectively reduces energy consumption, easing the burden on our environment. Let us join hands and harness the power of technology to safeguard the polar bear's fragile home.



40768台中市工業區33路17號 TEL+886-4-23595237 FAX+886-4-23595235
No. 17, 33rd Road, Taichung Industrial Park, Taichung, Taiwan 40768
Http://www.rhymebus.com.tw E-mail: inverter@mail.rhymebus.com.tw
XB200243 / 2506 Ver1 / 2510



Information is subject to change without notice.




AC Motor Drive for HVAC

RM6F6 Series



Master the Air, Master the Flow!

The RM6F6, powered by high-efficiency VFD technology, optimizes fluid system control, ensuring precise management of pressure, flow, and temperature. This significantly lowers energy consumption and enhances system performance, delivering outstanding energy savings.



Temperature Control

- Wet-bulb temperature control
- Differential temperature control



Smart Management

- Water-usage detection
- Multi-drive parallel control
- Backup unit auto takeover



Pressure Control

- Various pressure control modes
- Differential Pressure control



System Protection

- Dry run and cavitation protection
- Overpressure alarm/protection
- Noise prevention

Features

- ◆ Integrated full pump control enables standalone multi-pump parallel systems without an external controller.
- ◆ Minimum operating units can be set to ensure stable water supply.
- ◆ Capable of obtaining system's constant pressure while pump disengages from operation for maintenance.
- ◆ Sensorless vector control supports induction and PMSM motors, offering high efficiency and stable performance at all speeds.
- ◆ Provides fire mode operation, suitable for ventilation system and fire safety equipment in emergency mode.
- ◆ Automatic restart upon power interruption or abnormal tripping, with adjustable restart intervals and retry limits.
- ◆ The keypad displays the setting value and practical value at the same time.
- ◆ Parameters of master drive can be easily copied to slave drive without setting each unit individually.

Advanced Control Modes


PID Constant Pressure Control

With built-in multi-mode PID pressure control, auto switchover to slave drive in an event of an abnormality and master/slave rotation functions. Supports up to 8 units in parallel with alternating operation to ensure uninterrupted performance, enhancing system reliability and service life.




E-Mode

Multiple pumps run at the same speed. Flow rise rapidly. Steady pressure while drive separates. Suitable for processing cooling water.

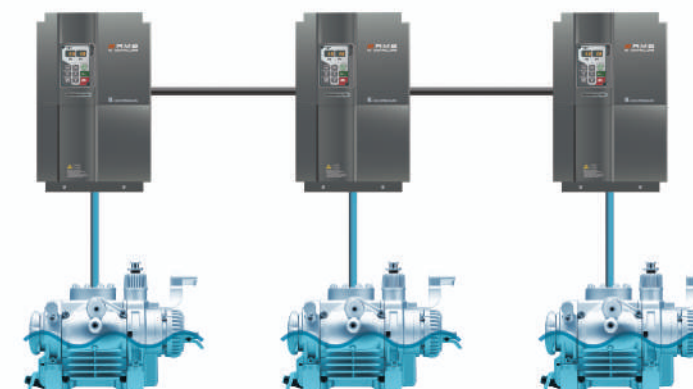


F-Mode

One operates to control speed, others at full speed or standby. Stabilizes pressure effectively. Suitable for general water supply systems.

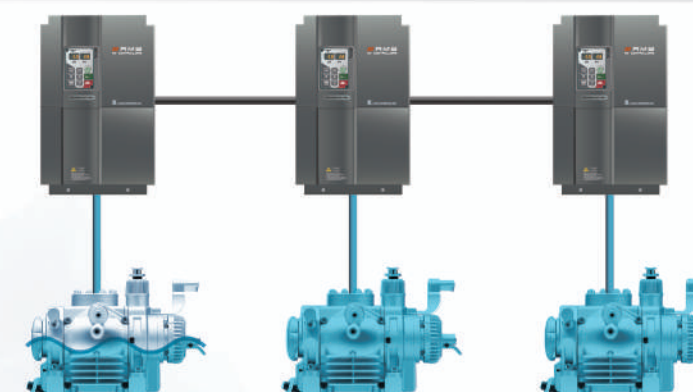


Auto Shift

Master pump and slave pumps operate alternately, prevents slave pumps from idling for too long and cause abnormal situation.

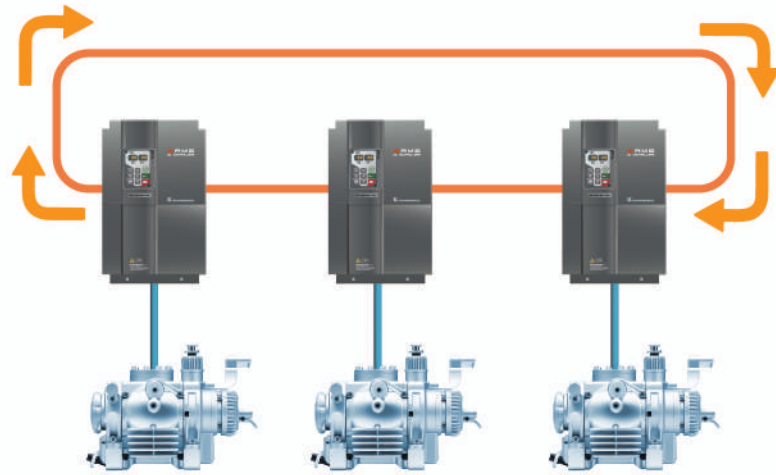


On / Off Mode

When water pipe leakage is detected, the inverter automatically switches to on-off mode, preventing motor from starting repetitively, lowering noise and lowering power consumption.

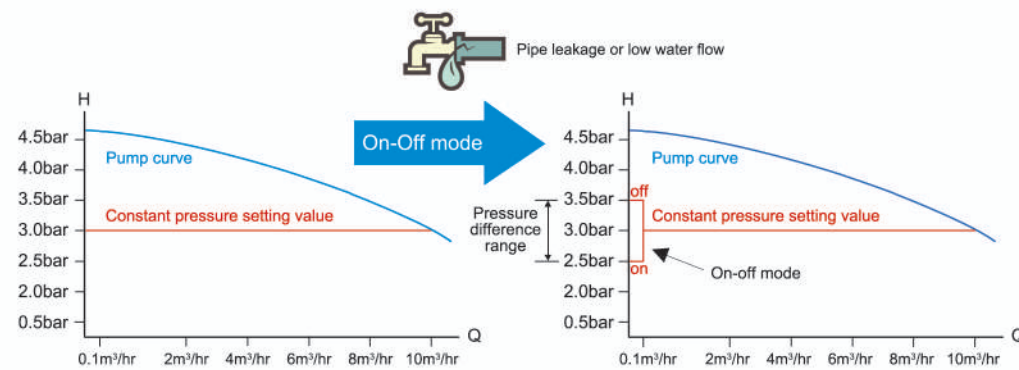


Temperature/Differential Temperature Control Mode

Temperature and wet-bulb temperature compensation control, suitable for energy-saving control of fans, cooling towers, and air handling units.

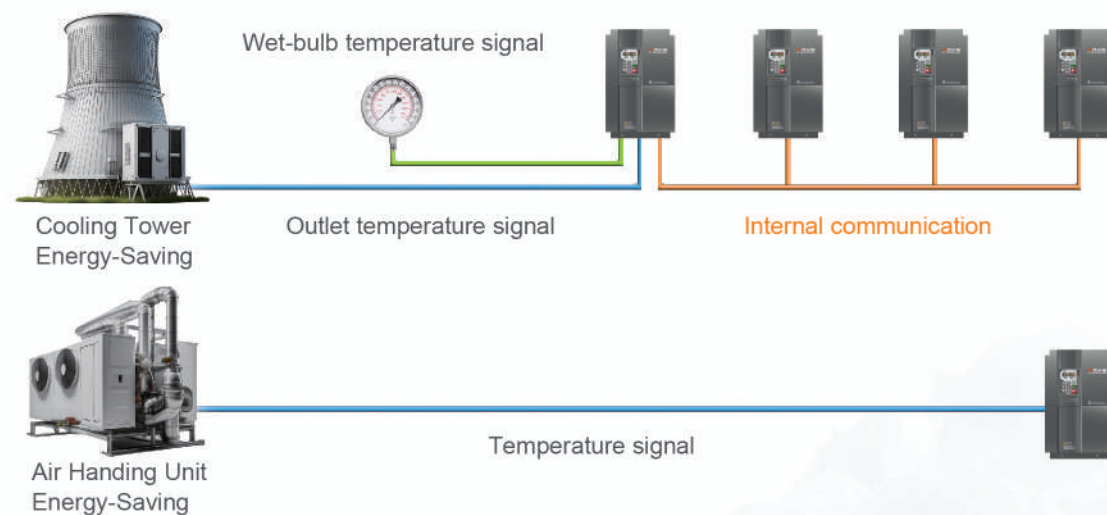

Smart Hand On

The affected pump can be disconnected directly if one of the pump in parallel system fails, and others will automatically take over operation.

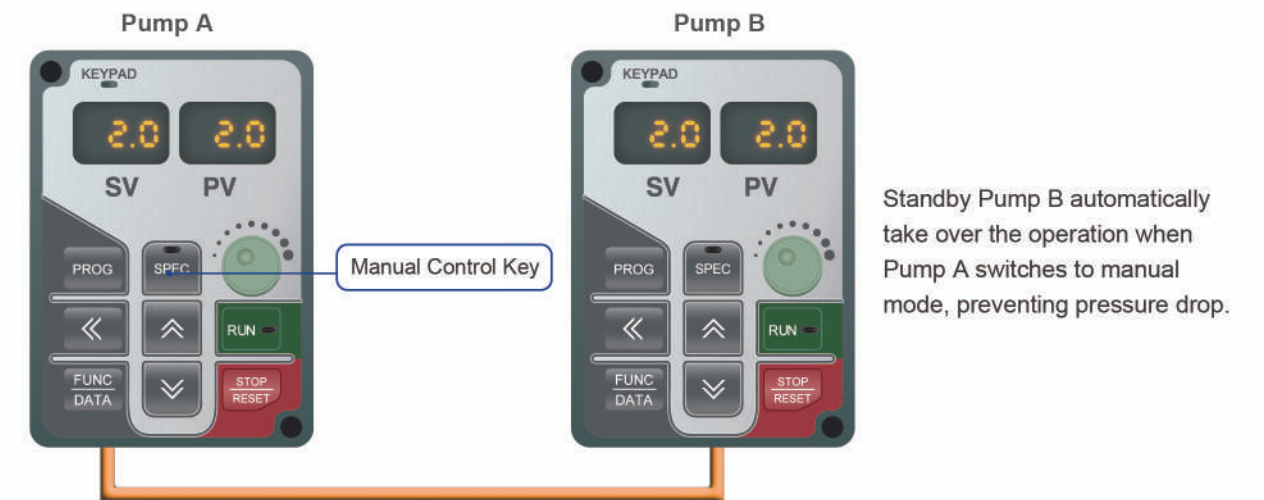


Fire Mode

The fire mode ensures maximum ventilation and water supply by overriding normal protections, keeping the system running at full capacity until failure to minimize damage.





Control Terminals Wiring

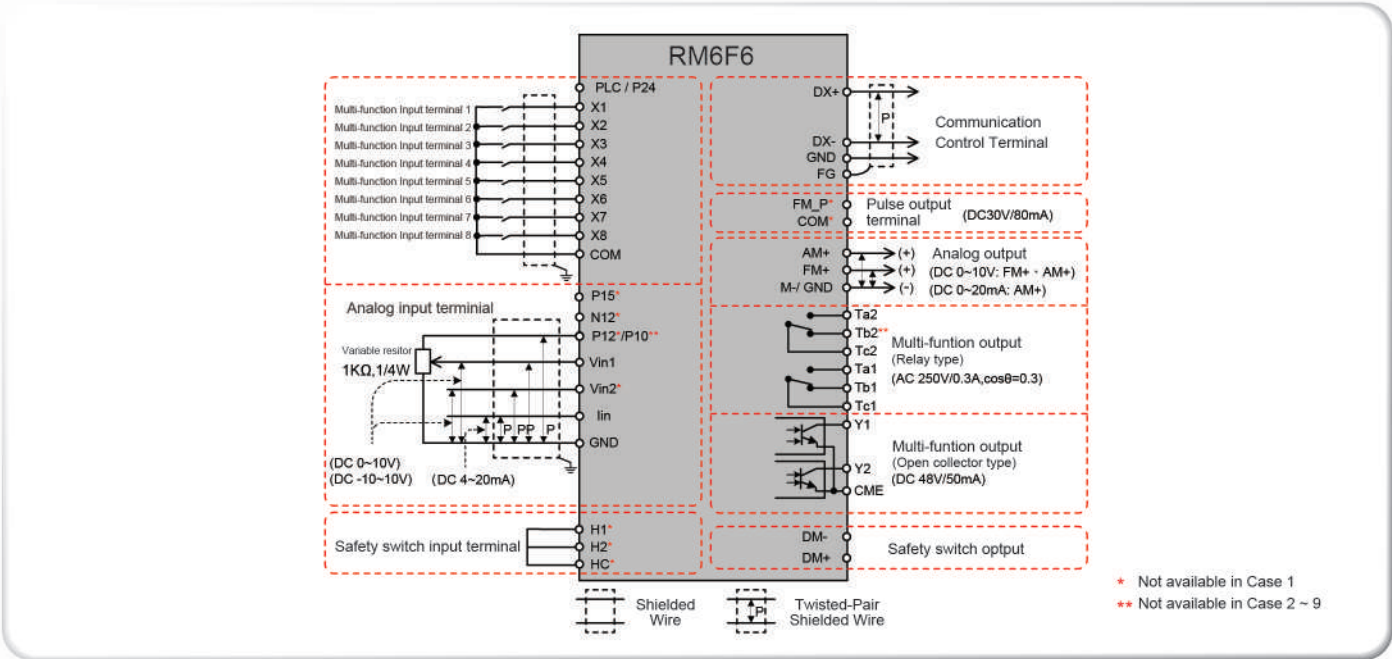

Control Terminal

Type	Symbol	Function	Description
Control Terminal	PLC/P24	Control Power	Output DC+24V Max current: 100mA
	P12*/P10**		Output DC+12V (Case 1: DC+10V), Max current 20mA
	N12*		Output DC-12V, Maximum supplied current is 20mA
	GND	Common Terminal	Common terminal for power control (P12、N12、P15) and analog input (Vin1/ Vin2/ lin)
	X1	Multi-Function Input Terminal 1	● Set the function at H1-00. Default setting: Forward
	X2	Multi-Function Input Terminal 2	● Set the function at H1-01. Default setting: Reverse
	X3	Multi-Function Input Terminal 3	● Set the function at H1-02. Default setting: Jog
	X4	Multi-Function Input Terminal 4	● Set the function at H1-03. Default setting: External fault
	X5	Multi-Function Input Terminal 5	● Set the function at H1-04. Default setting: Reset
	X6	Multi-Function Input Terminal 6	● Set the function at H1-05. Default setting: Disable
	X7	Multi-Function Input Terminal 7	● Set the function at H1-06. Default setting: Disable
	X8	Multi-Function Input Terminal 8	● Set the function at H1-07. Default setting: Disable
	COM	Common Terminal	● Common of input control terminal (X1~X8) ● Control power (PLC), pulse input signal (FM_P)
	Vin1	Analog Input Terminal 1	● Analog input terminal 1
	Vin2*	Analog Input Terminal 2	● Input range DC 0~10V or DC -10~10V, input impedance 20kΩ
	lin	Analog Input Terminal 3	● Selective function of DIP switch-SW1: Current signal or voltage signal
	FM_P*	Pulse Output Signal Terminal	● NPN open collector isolated output: Maximum value: 30VDC/80mA.
	AM +	Analog Output Terminal 1	● Selective output signal-JP4: Current signal or voltage signal
Multi-Function Output Terminals	FM +	Analog Output Terminal 2	● Set the function at H4-00. Default setting: Output frequency
	M -*/ GND	Common Terminal	● Common of analog output terminals
	Ta1	Digital Output (Relay Type)	● Set the function at H2-04. Default setting: Error detection
	Tb1		● Set the function at H2-04. Default setting: Error detection
	Tc1		● Common of Ta1, Tb1 terminals
	Ta2		● Set the function at H2-05. Default setting: During operation
	Tb2**		● Set the function at H2-05. Default setting: During operation
	Tc2		● Common of Ta2 terminal
	Y1	Digital Output (Open Collector Type)	● Set the function at H2-00. Default setting: Zero speed
	Y2		● Set the function at H2-01. Default setting: Constant speed
	CME		● Common of Y1, Y2 terminals


* Not available in Case 1 ** Not available in Case 2

General Specifications


Control Characteristics	Control method		V/F control, PM Sensorless, IM Sensorless Carrier frequency : 800Hz ~ 16kHz
	Range of frequency setting		0.1~599Hz
	Resolution of frequency setting		● Digital Keypad (KP-601A): 0.01Hz ● Analog Signal: 0.06Hz / 60Hz
	Resolution of output frequency		0.01Hz
	Frequency setting signal		DC 0~10V 、 -10~+10V 、 4~20mA
	Overload protection		120% of drive rated output current for 1 min. (Inverse time curve protection)
	DC braking		● Time of DC braking after stop/before start: 0~60.0sec ● DC braking frequency at stop: 0.1 ~ 60Hz ● DC braking level: 0~150% of rated current
	Braking torque		Approximately 20% (with built-in braking resistor connected, braking torque is above 100%)
	Acceleration / deceleration time		● 0.1~3200.0sec or 0.01~320.0sec ● The setting of acceleration/deceleration time can be adjusted from 0.01Hz to 599.00Hz.
	Stall prevention		● Stall prevention during acceleration/constant speed (Stall prevention current level 30~200%) ● Stall prevention during deceleration
	V/F pattern		● Linear, Square Curve, 1.7th power curve, 1.5th power curve ● V/F pattern (2 V/F points) ● V/F pattern can be adjusted by analog input (Voltage can be adjusted individually)
	Other functions		Slip compensation, auto-torque compensation, auto-adjustment for output voltage stability, auto-adjustment of carrier frequency, restart after instantaneous power failure, speed tracing, overload detection, acceleration/deceleration switch, parameters copy, counter function, timer function, Modbus communication, output frequency upper limit, output frequency lower limit, cooling fan control, password lock, predictive maintenance information, error record, multi-pumps parallel control, constant pressure control mode, ON/OFF mode, pump protection, noise prevention, Overpressure protection, Friction loss compensation
Operation Characteristics	Input	Digital Input	8 sets programmable input terminals: X1~X8
		Analog Input	● Vin1/Vin2*-GND : DC 0~10V or DC -10~+10V ● lin-GND : DC 4~20mA/2~10V or DC 0~20mA/0~10V
		Communication	Operation controls and monitors via communication by external device.
	Output	Digital Output	4 sets programmable output detection: Ta2-Tc2 、 Ta1-Tb1-Tc1 、 Y1-CME 、 Y2-CME
		Analog Output	● "FM+" – "M-" : DC 0 ~ 10V ● "AM+" – "M-" : DC 4~20mA or DC 0 ~ 10V
Display	Digital Keypad (KP-601A)		Monitor the frequency of drive, voltage, current, terminal status ... etc.
Protection	Fault protection	Error trip of drive	EEPROM error (EEr), fuse open (SC), under voltage during operation (LE1), drive over current (OC), grounding fault (GF), over voltage (OE), drive overheat (OH), motor overload (OL), drive overload (OL1), system overload (OLO), external fault (EF), keypad interruption during copy (PADf), input/output phase failure protection (IPLF/OPLF)
		Error trip of pressure control	PID feedback signal error(no Fb), Over pressure(OP), Water shortage(Fb Lo) cooling method: Fan-cooling (except RM6F6-2A004, 2A007, 4A004 models which are natural-cooling)
		Warning messages of drive	Power source under voltage(LE), Drive output interruption(bb), Coast to stop(Fr), Dynamic brake transistor over voltage (db), Keypad cable trip before connection(Err_00), Keypad cable trip during connecting(Err_01), FWD/REV command input simultaneously(dFt), Different software version inter-copy(wrF), Parameter copy failure.
	cooling method		Fan-cooling (except RM6F6-2A004, 2A007, 4A004 models which are natural-cooling)
Environment	Atmosphere		Non-corrosive or non-conductive, or non-explosive gas or liquid, and non-dusty
	Surrounding temperature		-10 °C (14 °F) ~ +40 °C (104 °F) (Non-freezing and non-condensing)
	Storage temperature		-20 °C (-4 °F) ~ +70 °C (158 °F)
	Relative humidity		90% RH or less (non-condensing atmosphere)
	Vibration		Less than 5.9m/sec ² (0.6G)
Altitude		Less than 1000m (3280 ft.)	

Outline Dimensions


case1

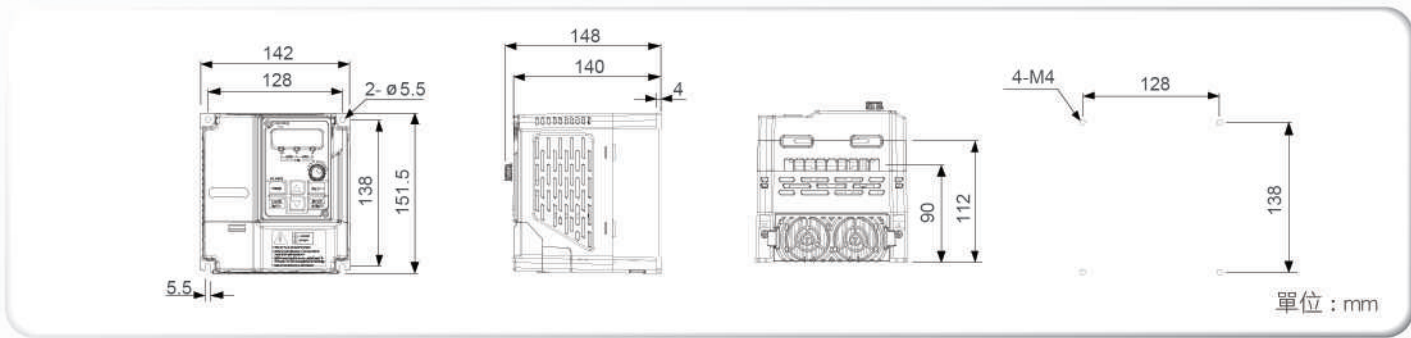

case 2~4

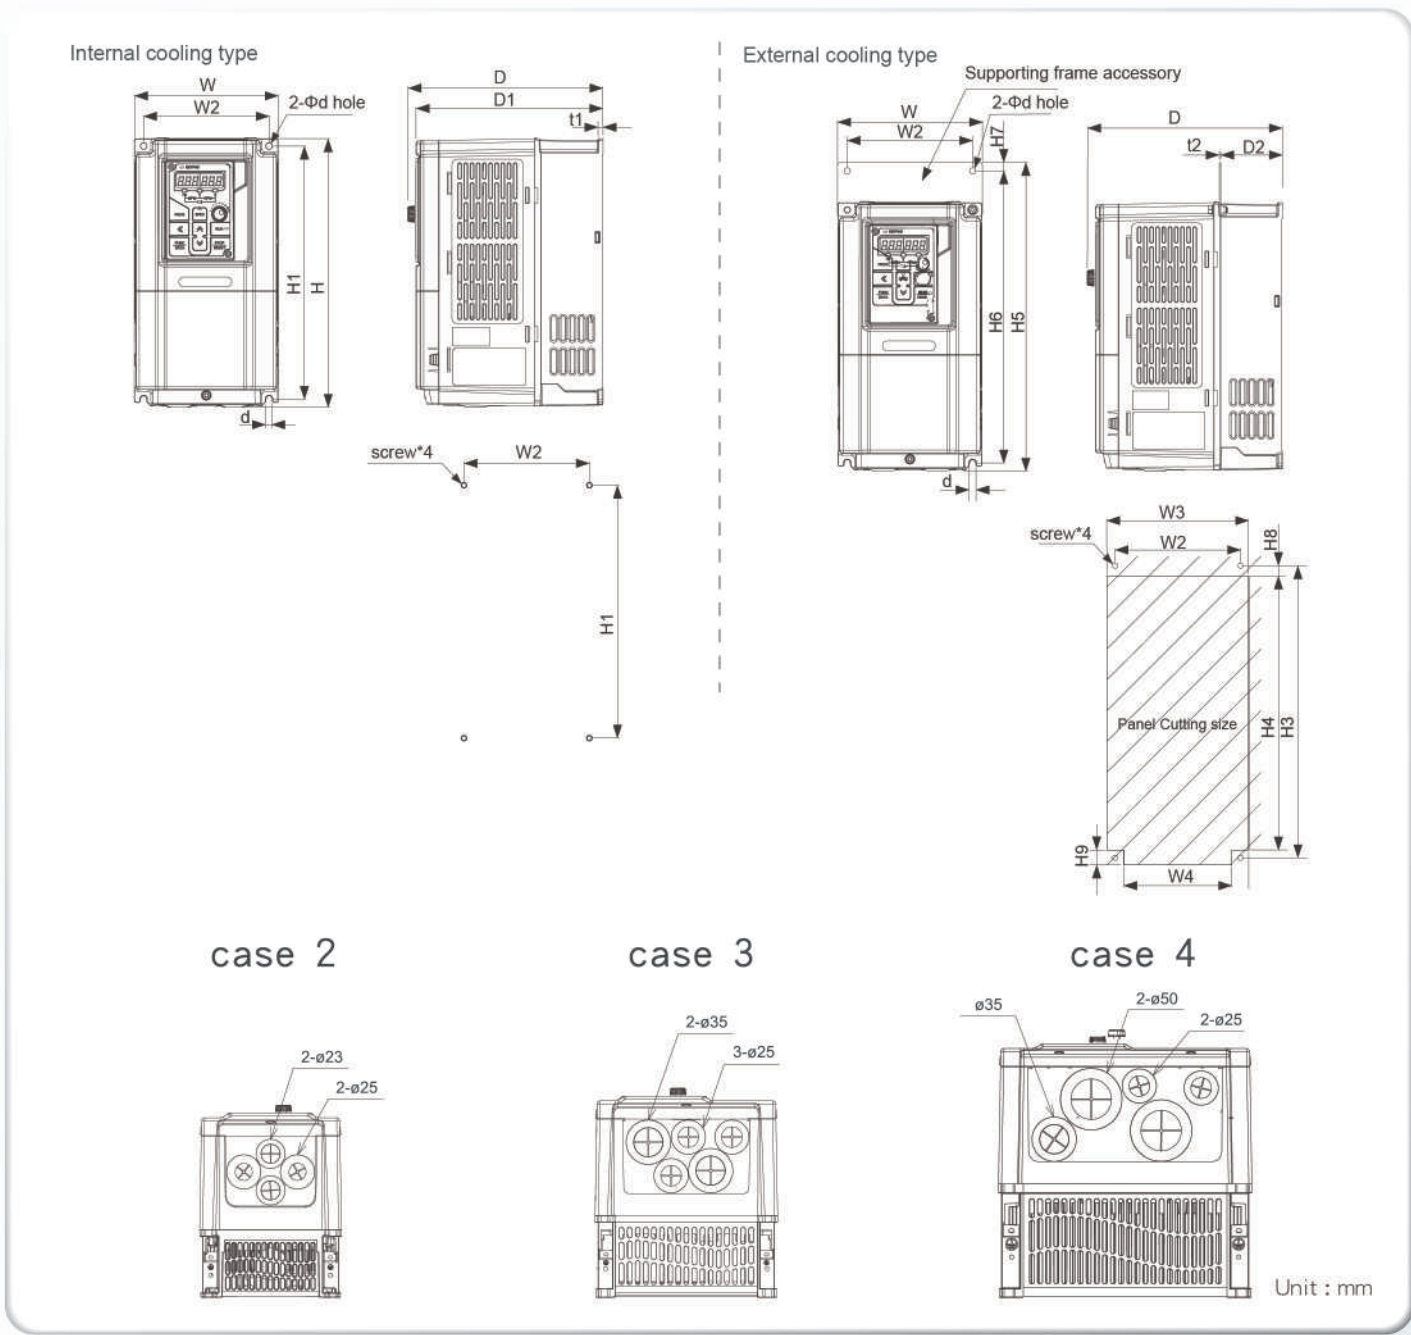

case 5~9

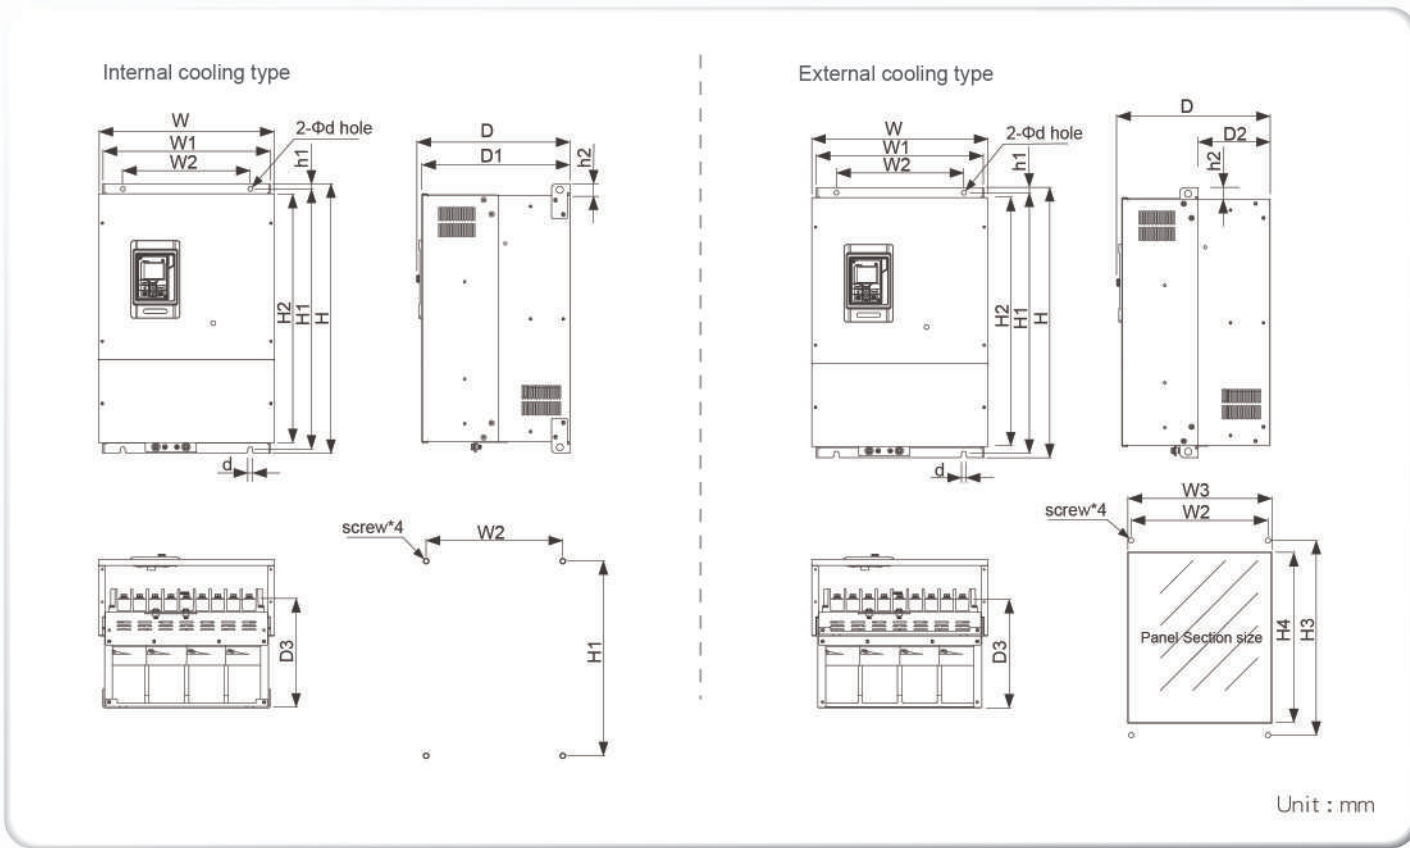

Dimensions

Case	Model Number		Size(mm)																								Screw
	200V	400V	W	W1	W2	W3	W4	H	H1	H2	H3	H4	H5	H6	H7	H8	H9	h1	h2	t1	t2	D	D1	D2	D3	d	(mm)
CASE2	025~031	018~023	140	-	122	138	105	260	246	-	284	267	300	284	8	9.5	14.5	-	-	4.7	1.2	190	182	60	-	6.5	M5
CASE3	042~060	031~045	180	-	162	177	148	290	277	-	313	290	329	313	8	11.5	20	-	-	9	1.6	207	199	74	-	7	M5
CASE4	075~150	058~110	250	-	230	247	211	400	380	-	427	396	448	427	10	11.5	29	-	-	9.5	2	258	250	103	-	9	M8
CASE5	185~275	144~216	386	361	275	365	-	584	562	539	564	545	-	-	-	-	-	11	25	-	-	332	325	155	242	10	M8
CASE6	346	253~304	446	418	275	427	-	685	660	630	662	634	-	-	-	-	-	14	30	-	-	342	334	162	246	12	M10
CASE7	410~500	377~415	508	479	275	487	-	818	785	751	788	758	-	-	-	-	-	19	35	-	-	375	366	183	257	15	M12
CASE8	700~840	480~700	696	654	580	657	-	1000	974	929	978	936	-	-	-	-	-	15	39	-	-	411	405	181	294	15	M12
CASE9	-	860~960	992	954	710	958	-	1030	1003	963	1007	968	-	-	-	-	-	15	39	-	-	427	419	184	308	15	M12